



LD60 LED Street Light

➤ Applications

Widely used in Park road, Industrial park road, Sidewalk, Residential areas, Path way, Rural road, Garden, Country yard, Park, Street, Plaza, government lighting project ,etc.

➤ Picture



➤ Features


- Each module can be replaced separately and easy for installation its cost efficiently;
- Waterproof grade IP 65;
- Elegant design and better heat sink;
- 3 years warranty.

➤ Specifications

Model		RY-SL-LD60
Optical Characteristics	CCT	6000k
	Luminous Flux	5520 lm±5%
	CRI	>80
Dimensions	Dimension	489*315*204 mm
	Net Weight	5.7 Kg
Electrical Specifications	Input Voltage	85~275V,50/60Hz
	Power	60W
	Power Factor	0.97
Life Span		>40000Hrs





➤ Dimension (Unit: mm)

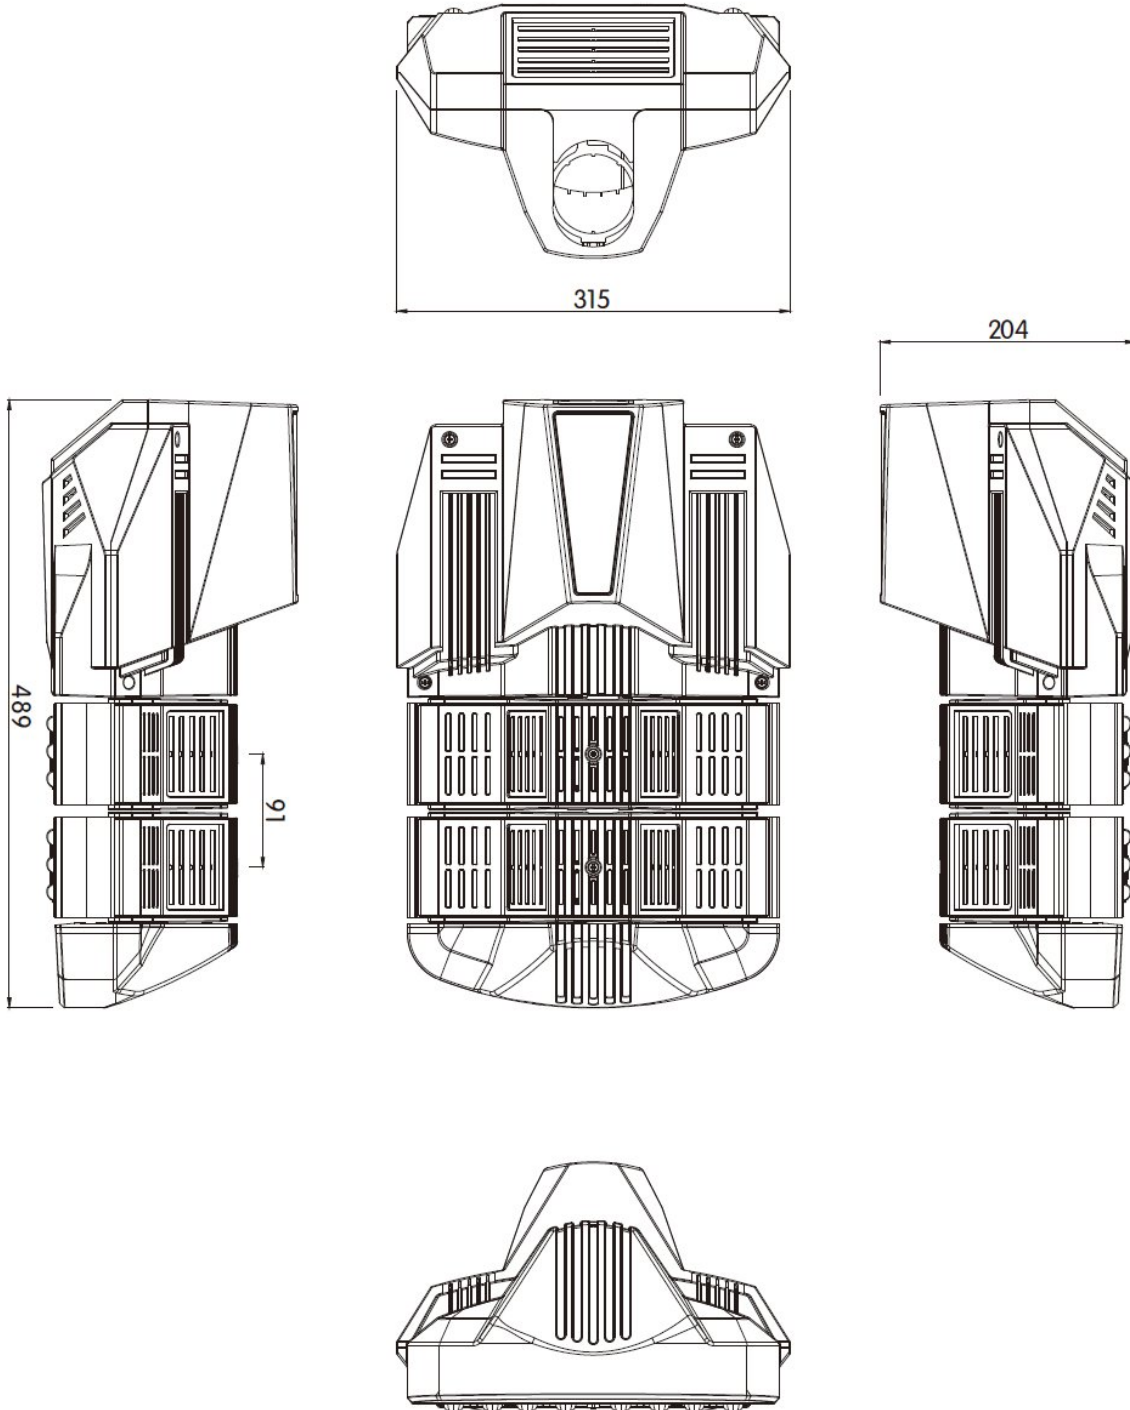



➤ Package

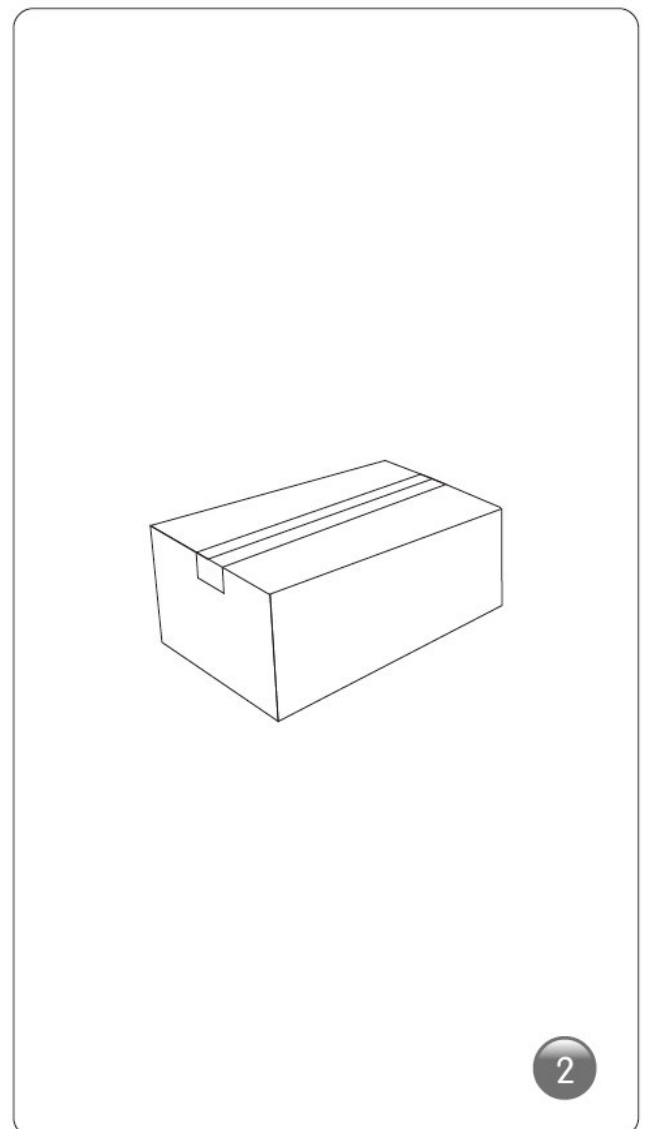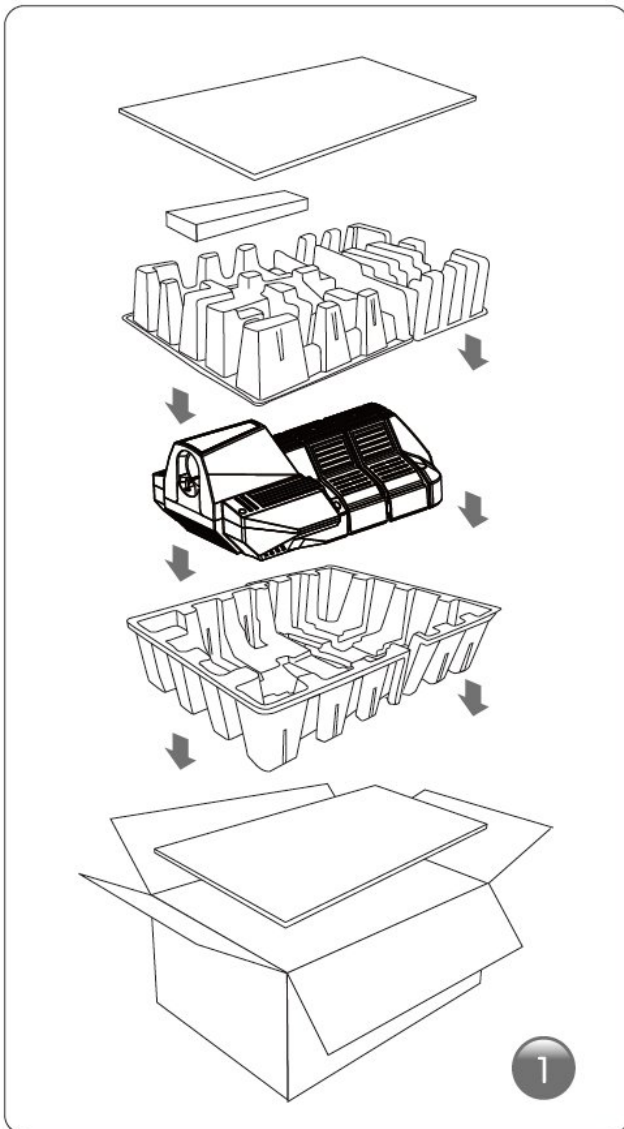

	Dimension L*W*H(mm)	Quantity (pcs)	Gross Weight (kg)
Box	580*390*275	1	6.2

➤ Cautions

1. Turn power off before inspection or installation.
2. Don't be used in completely enclosed recessed fixtures.
3. The outer casing will be damaged by corrosive chemicals and solvents.
4. Do not open to maintain the fixtures personally.